

Generator set data sheet



Model: C55 D5L (B3.3)
Frequency: 50 Hz
Fuel type: Diesel

| | |
|---------------------------------|-----------|
| Spec sheet: | S-6282-EN |
| Noise data sheet (open): | MSP-3032 |
| Airflow data sheet: | MCP-2028 |

| Fuel consumption | Standby | | | | Prime | | | |
|-------------------------|-----------------|------------|------------|-------------|-----------------|------------|------------|-------------|
| | kVA (kW) | | | | kVA (kW) | | | |
| Ratings | 55 (44) | | | | 50 (40) | | | |
| Load | 1/4 | 1/2 | 3/4 | Full | 1/4 | 1/2 | 3/4 | Full |
| US gph | 1.0 | 1.8 | 2.6 | 3.3 | 1.0 | 1.6 | 2.4 | 3.0 |
| L/hr | 3.9 | 6.8 | 9.7 | 12.5 | 3.7 | 6.1 | 8.9 | 11.4 |

| Engine | Standby rating | Prime rating |
|--------------------------------|-------------------------------|---------------------|
| Engine manufacturer | Cummins | |
| Engine model | 4BTAA3.3-G13 | |
| Configuration | In-line; 4 cylinder diesel | |
| Aspiration | Turbocharged and after-cooled | |
| Gross engine power output, kWm | 62.6 | 58 |
| BMEP at set rated load, kPa | 1538 | 1428 |
| Bore, mm | 95 | |
| Stroke, mm | 115 | |
| Rated speed, rpm | 1500 | |
| Piston speed, m/s | 5.75 | |
| Compression ratio | 19:1 | |
| Lube oil capacity, L | 8 | |
| Overspeed limit, rpm | 1650 | |
| Regenerative power, kW | N/A | |
| Governor type | Mechanical as standard | |
| Starting voltage | 12 V DC | |

| Fuel flow | |
|--|-------|
| Maximum fuel flow, L/hr | 45 |
| Maximum fuel inlet restriction, mm Hg (clean filter) | 101.6 |
| Maximum fuel inlet temperature, °C | 70 |

| Air | Standby rating | Prime rating |
|--------------------------------------|-----------------------|---------------------|
| Combustion air, m ³ /min | 4.64 | 4.19 |
| Maximum air cleaner restriction, kPa | 2.5 | |

Exhaust

| | | |
|---|-------|------|
| Exhaust gas flow at set rated load, m ³ /min | 10.64 | 9.76 |
| Exhaust gas temperature, °C | 491 | 483 |
| Maximum exhaust back pressure, kPa | 10 | |

Standard set-mounted radiator cooling

| | | |
|---|---------|------|
| Ambient design, °C @ 12.7mm H ₂ O | 55 | |
| Fan load, kW _m | 2 +/- 1 | |
| Coolant capacity (with radiator), L | 10.7 | |
| Cooling system air flow, m ³ /sec @ 12.7 mm H ₂ O | 1.611 | |
| Total heat rejection, Btu/min | 1744 | 1560 |
| Maximum cooling air flow static restriction, mm H ₂ O | 25.4 | |

Weights

| | Open | Enclosed |
|-------------------------------------|-------------|-----------------|
| Unit dry weight, kg (standard skid) | 922 | 1236 / 1230** |
| Unit wet weight, kg (standard skid) | 1010 | 1414 / 1340** |
| Unit dry weight, kg (optional skid) | 1140 | 1543 |
| Unit wet weight, kg (optional skid) | 1228 | 1631 |

**Note: Weights and dimensions are for Chassis lifting arrangement option.


Dimensions

| | Length | Width | Height |
|---|---------------|--------------|---------------|
| Open set dimensions (standard skid) | 2050 | 967 | 1510 |
| Enclosed set dimensions (standard skid) | 2270 / 2276** | 975 / 973** | 1920 / 1793** |
| Open set dimensions (optional skid) | 2270 | 967 | 1720 |
| Enclosed set dimensions (optional skid) | 2270 | 975 | 2115 |


**Note: Weights and dimensions are for Chassis lifting arrangement option.

Genset outline

Open set

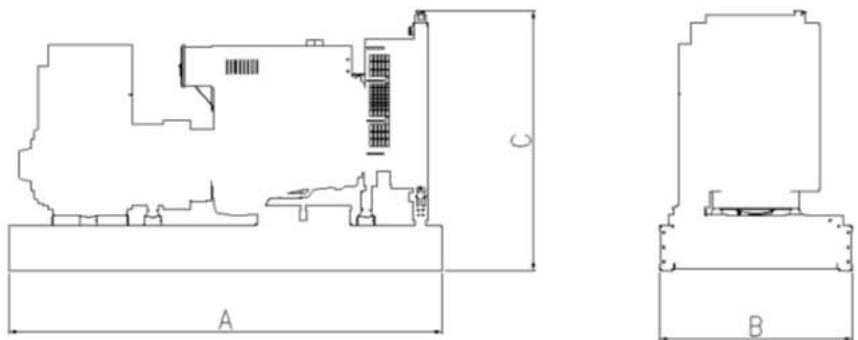

Enclosed set

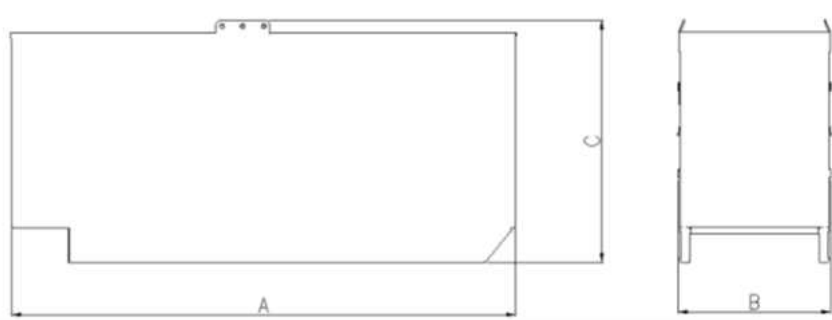

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator data

| Connection ¹ | Temp rise °C | Duty ² | Alternator | Voltage |
|-------------------------|--------------|-------------------|------------|---------|
| Wye, 3-phase | 163/125 | S/P | UC122 4D | 380-415 |
| Wye, 3-phase | 150/105 | S/P | UC122 4E | 380-415 |

Ratings definitions

| Emergency Standby Power (ESP): | Limited-Time running Power (LTP): | Prime Power (PRP): | Base load (Continuous) Power (COP): |
|---|--|--|---|
| Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789 and DIN 6271. | Applicable for supplying power to a constant electrical load for limited hours. Limited-Time Running Power (LTP) is in accordance with ISO 8528. | Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789 and DIN 6271. | Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) is in accordance with ISO 8528, ISO 3046, AS 2789 and DIN 6271. |

Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times \text{SinglePhaseFactor} \times 1000}{\text{Voltage}}$$

For more information contact your local Cummins distributor or visit power.cummins.com

Our energy working for you.™

